

# 29 mm (1.13") photomultiplier

## 9107B series data sheet

### 1 description

The 9107B is a 29 mm (1.13") diameter end window photomultiplier with blue-green sensitive bialkali photocathode and 11 high gain, high stability, SbCs dynodes of linear focused design. The 9107QB is a variant for applications requiring uv sensitivity.

### 2 applications

- wide range of applications
- spectroscopy
- x-ray & gamma-ray spectroscopy
- photon counting of bio- and chemi-luminescent samples

### 3 features


- compact (a short version of the 9125B)
- high gain
- low operating voltage
- good SER
- good pulse height resolution

### 4 window characteristics

	9107B borosilicate	9107QB* fused silica
spectral range**(nm)	280 - 630	160 - 630
refractive index ( $n_d$ )	1.49	1.46
K (ppm)	300	<10
Th (ppb)	250	<10
U (ppb)	100	<10

\* note that the sidewall of the envelope contains graded seals of high K content  
\*\*wavelength range over which quantum efficiency exceeds 1 % of peak

### 5 typical spectral response curves

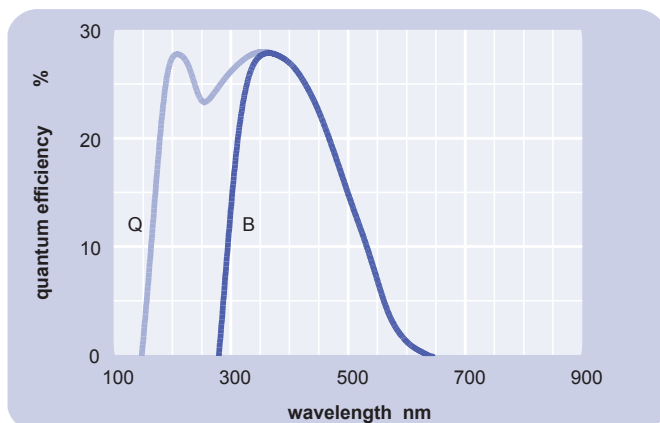


### 6 characteristics

	unit	min	typ	max
<b>photocathode: bialkali</b>				
active diameter	mm		25	
quantum efficiency at peak	%		28	
luminous sensitivity	$\mu\text{A/lm}$		65	
with CB filter		7	11	
with CR filter			1	
<b>dynodes: 11LFSbCs</b>				
<b>anode sensitivity in divider A:</b>				
nominal anode sensitivity	A/lm		200	
max. rated anode sensitivity	A/lm		2000	
overall V for nominal A/lm	V		850	1150
overall V for max. rated A/lm	V		1100	
gain at nominal A/lm	$\times 10^6$		3	
<b>dark current at 20 °C:</b>				
dc at nominal A/lm	nA		0.2	5
dc at max. rated A/lm	nA		2	
dark count rate	$\text{s}^{-1}$		100	
<b>afterpulse rate:</b>	%		1	
afterpulse time window	$\mu\text{s}$	0.1		6.4
<b>pulsed linearity (-5% deviation):</b>				
divider A	mA		25	
divider B	mA		100	
<b>pulse height resolution:</b>				
single electron peak to valley	ratio		2	
$^{137}\text{Cs}$ with 1" x 1" NaI (T1)			7.5	
<b>rate effect (<math>I_a</math> for <math>\Delta g/g=1\%</math>):</b>	$\mu\text{A}$		20	
<b>magnetic field sensitivity:</b>				
the field for which the output decreases by 50 %				
most sensitive direction	$T \times 10^{-4}$		2	
<b>temperature coefficient:</b>	$\% \text{ } ^\circ\text{C}^{-1}$		$\pm 0.5$	
<b>timing:</b>				
single electron rise time	ns		4.5	
single electron (fwhm)	ns		7.5	
single electron jitter (fwhm)	ns		4	
transit time	ns		33	
<b>weight:</b>	g		45	
<b>maximum ratings:</b>				
anode current	$\mu\text{A}$			100
cathode current	nA			50
gain	$\times 10^6$		30	
sensitivity	A/lm		2000	
temperature	$^\circ\text{C}$	-30		60
V (k-a) <sup>(1)</sup>	V		2000	
V (k-d1)	V		300	
V (d-d) <sup>(2)</sup>	V		300	
ambient pressure (absolute)	kPa			202

<sup>(1)</sup> subject to not exceeding max. rated sensitivity <sup>(2)</sup> subject to not exceeding max rated V(k-a)

### 7 typical voltage gain characteristics

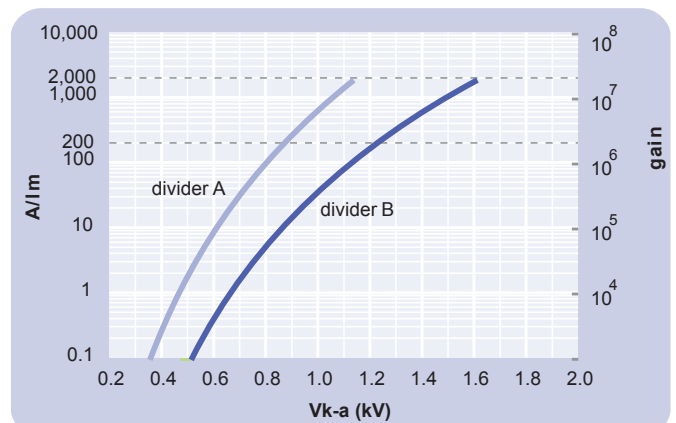


## 8 voltage divider distribution

	k	d <sub>1</sub>	d <sub>2</sub>	.....	d <sub>8</sub>	d <sub>9</sub>	d <sub>10</sub>	d <sub>11</sub>	a	
A	2R	R	.....	R	R	R	R	R	R	Standard
B	2R	R	.....	R	2R	3R	4R	3R		High Pulsed Linearity


Characteristics contained in this data sheet refer to divider A unless stated otherwise.

## 9 external dimensions mm

The drawings below show the 9107B in hardpin format, the 9107FLB in flying lead format with temporary B14B base fitted and the 9107FLB in flying lead format.

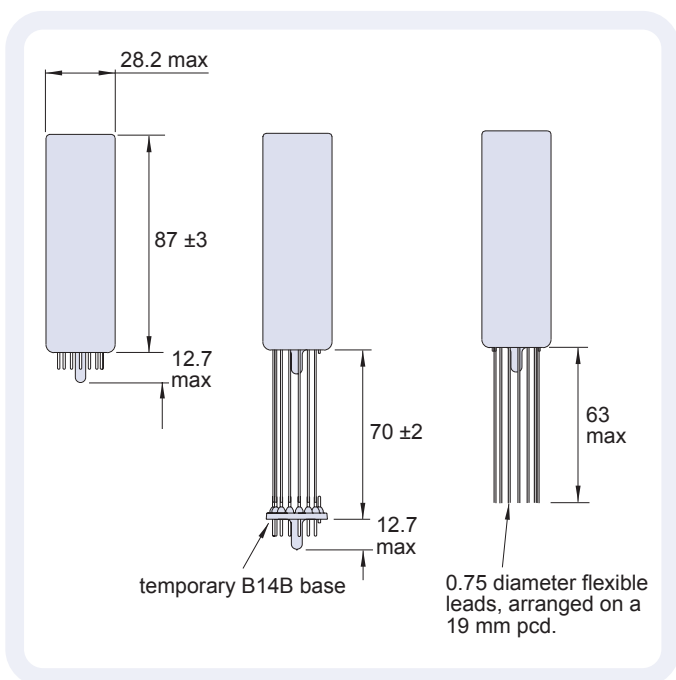


## 10 base configuration (viewed from below)



**B14B hardpin base**  
(For 9107B)

\*'ic' indicates an internal connection





**flying lead base**  
(For 9107FLB)  
after removal of temporary base.

\*'cl' indicates cut lead

Our range of B14B sockets, available for the B14B hardpin base, includes versions with or without a mounting flange, and versions with contacts for mounting directly onto printed circuit boards.

## 11 ordering information

The 9107B meets the specification given in this data sheet. You may order **variants** by adding a suffix to the type number. You may also order **options** by adding a suffix to the type number. You may order product with **specification options** by discussing your requirements with us. If your selection option is for one-off order, then the product will be referred to as 9107A. For a repeat order, ET Enterprises will give the product a two digit suffix after the letter B, for example B21. This identifies your specific requirement.

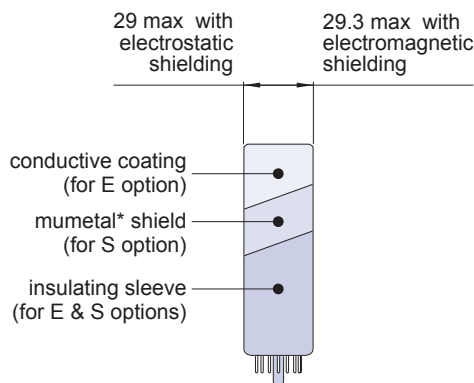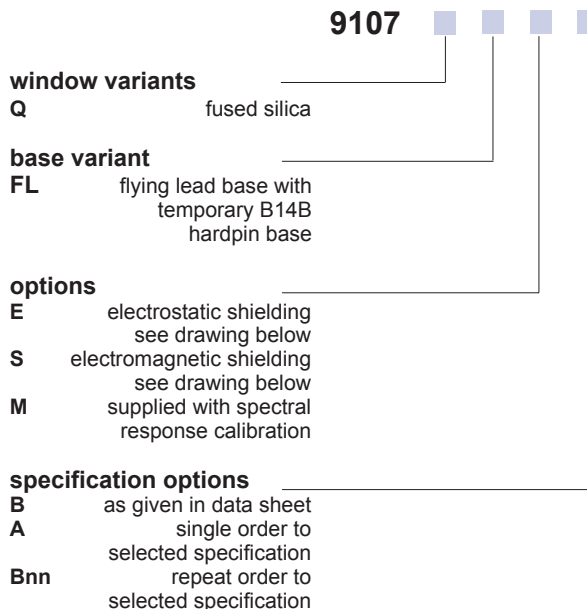

\*mumetal is a registered trademark of Magnetic Shield Corporation

## 12 voltage dividers

The standard voltage dividers available for all variants of these pmts are tabulated below:

	k	d <sub>1</sub>	d <sub>2</sub>	.....	d <sub>7</sub>	d <sub>8</sub>	d <sub>9</sub>	d <sub>10</sub>	d <sub>11</sub>	a
C637A	2R	R	.....	R	R	R	R	R	R	
C637B	2R	R	.....	R	2R	3R	4R	3R		
C637C	150 V	R			R	R	R	R	R	

R = 330 kΩ

choose accessories for this pmt on our website

an ISO 9001 registered company

The company reserves the right to modify these designs and specifications without notice. Developmental devices are intended for evaluation and no obligation is assumed for future manufacture. While every effort is made to ensure accuracy of published information the company cannot be held responsible for errors or consequences arising therefrom.



© ET Enterprises Ltd, 2010  
DS\_ 9107B Issue 8 (23/08/10)

**ET Enterprises Limited**  
45 Riverside Way  
Uxbridge UB8 2YF  
United Kingdom  
tel: +44 (0) 1895 200880  
fax: +44 (0) 1895 270873  
e-mail: sales@et-enterprises.com  
web site: www.et-enterprises.com

**ADIT Electron Tubes**  
300 Crane Street  
Sweetwater TX 79556 USA  
tel: (325) 235 1418  
toll free: (800) 399 4557  
fax: (325) 235 2872  
e-mail: sales@electrontubes.com  
web site: www.electrontubes.com