

photomultiplier HV power supply module

HVM2000 series data sheet (provisional)

1 description

The HVM2000 series is a range of high stability modular high voltage supplies designed for powering photomultipliers or other applications requiring up to 2000V at 1mA. The output voltage is adjustable down to 20V using one of three control modes: internal potentiometer, external potentiometer, or remote analogue control. Four versions are available offering a choice of +12V or +24V supply voltage, and +2000V or -2000V output voltage.

All versions incorporate voltage and current monitoring and are protected against input polarity reversal, output overload, output short-circuit and output flashover.

2 applications

The HVM2000 series is intended for use in industrial instrumentation and can support photomultiplier operation in the following modes:

- current measurement (analogue)
- pulsed light
- photon counting

3 features

- compact
- choice of three control modes
- low noise
- voltage and current monitor points
- internal reference voltage source

4 specifications


	unit	HVM2000/12N			HVM2000/24N			HVM2000/12P			HVM2000/24P		
		min	typ	max	min	typ	max	min	typ	max	min	typ	max
supply voltage:													
HVM2000/12	V												15
HVM2000/24	V												30
control voltage:													
HVM2000/12	V												6
HVM2000/24	V												11
temperature (operating):													
at 93% RH, non-condensing	°C												60
supply voltage	V	+11		+14	+22		+28	+11		+14	+22		+28
control voltage	V	0		+5	0		+10	0		+5	0		+10
output voltage	V	-20		-2000	-20		-2000	+20		+2000	+20		+2000
output current	mA	0		1	0		1	0		1	0		1
reference voltage output (max 5mA):													
fixed	V		5			10			5			10	
adjustable	V	0		5	0		10	0		5	0		10
voltage monitor output:													
for output voltage 0 - 2000V	V	0		2	0		2	0		2	0		2
current monitor output:													
for output current 0 - 1mA	V	0		5	0		10	0		5	0		10
input current:													
for zero output current*	mA		4			2			4			2	
for output current = 1mA	mA		320			160			320			160	
line regulation	%/V		0.01			0.01			0.01			0.01	
load regulation:													
for output current 0 - 1mA	%		0.01			0.01			0.01			0.01	
temperature coefficient	%/°C			0.05			0.05			0.05			0.05
switch-on time (10-90%)*	s			0.3			0.3			0.3			0.3
switch-off time (90-10%)*	s			10			10			10			10
output voltage HF ripple*													
for output current = 1mA	mV(p _k -p _k)			1			1			1			1
weight	g		100			100			100			100	

*at HV = 1000V




5 ratings

7 programming options

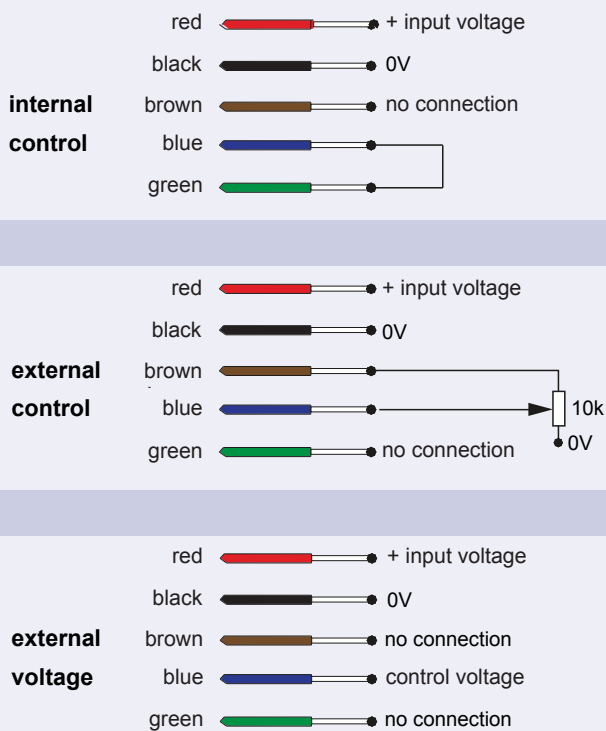

8 dimensions in mm

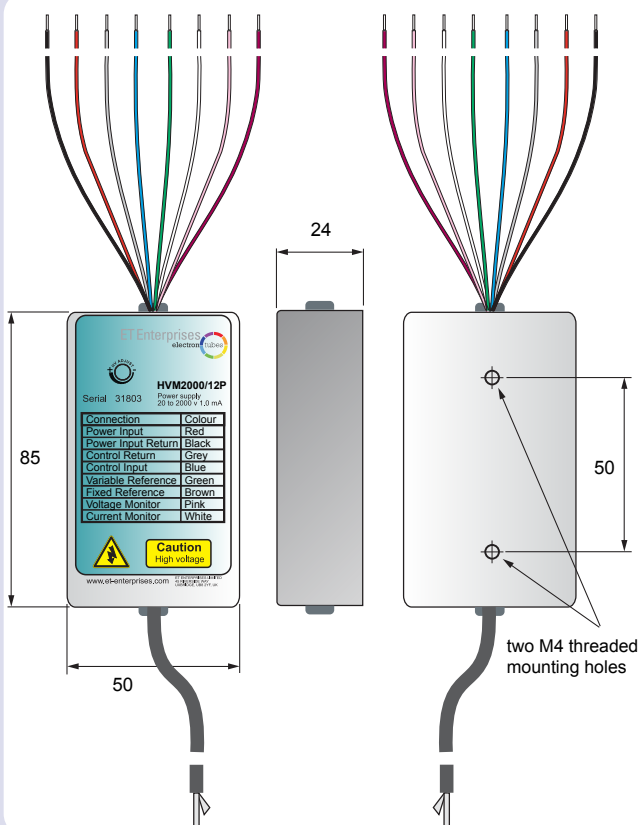

9 connections

flexible wires	colour
power input +ve	red
power input 0V	black
control input +ve	blue
control input 0V	grey
HV output (RG174 unterminated cable)	black
reference voltage output	
fixed	brown
adjustable	green
voltage monitor output	pink
current monitor output	white

10 ordering information

item	ordering code
negative output, 12V input	HVM2000/12N
negative output, 24V input	HVM2000/24N
positive output, 12V input	HVM2000/12P
positive output, 24V input	HVM2000/24P

11 warning

High voltages generated by these products present an electrical shock hazard and appropriate precautions must be taken. Installation must be by qualified personnel.

All units are despatched with the internal potentiometer set to zero.

Do not operate outside the quoted ratings of the HVM2000 or those of the photomultiplier. This may result in loss of performance or permanent damage or both.

It is important that the power input ground (black wire) is used as the return for current or voltage monitoring. The use of any other return could result in an error.

ET Enterprises Limited
45 Riverside Way
Uxbridge UB8 2YF
United Kingdom
tel: +44 (0) 1895 200880
fax: +44 (0) 1895 270873
e-mail: sales@et-enterprises.com
web site: www.et-enterprises.com

ADIT Electron Tubes
300 Crane Street
Sweetwater TX 79556 USA
tel: (325) 235 1418
toll free: (800) 399 4557
fax: (325) 235 2872
e-mail: sales@electron tubes.com
web site: www.electrontubes.com

an ISO 9001 and ISO 14001 registered company

The company reserves the right to modify these designs and specifications without notice. Developmental devices are intended for evaluation and no obligation is assumed for future manufacture. While every effort is made to ensure accuracy of published information the company cannot be held responsible for errors or consequences arising therefrom.

ET Enterprises
electron tubes

© ET Enterprises Ltd, 2015
DS_ HVM2000 series Issue 1 (05/06/15)