

## 1 description

The 9863/100B is a 51mm (2") diameter, end window photomultiplier with infra-red sensitive S20 photocathode, electrostatically reduced to 2.5mm diameter, and 14 BeCu dynodes of linear focused design for fast timing and extended linearity.

#### 2 applications

- LIDAR
- particle counting
- particle sizing
- general photon counting applications


# 3 features

- electrostatically reduced photocathode area (2.5 mm active diameter)
- high gain
- fast time response
- low dark count rate
- low afterpulse rate for time correlated studies

#### 4 window characteristics

	9863/100B borosilicate
spectral range *(nm) refractive index $(n_d)$	290 - 850 1.49
K (ppm)	300


\* wavelength range over which quantum efficiency exceeds 1 % of peak

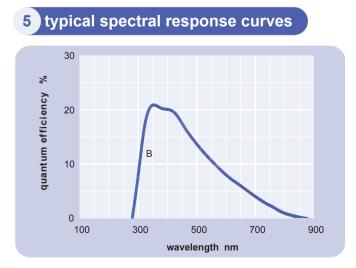

# 6 characteristics

mm % µA/lm A/lm A/lm	125	2.5 21 180 9 75 6	
A/Im		5000	
V		5000 10000 2200 2350 30	2500
nA nA s <sup>-1</sup> %		0.5 1 40 0.3	5 200 1
μs mA mA μA	0.1	50 150 1	3.2
% °C <sup>-1</sup> ns ns ns ns g		± 0.5 2 3 2.3 45 190	
μA nA × 10 <sup>6</sup> A/Im °C V V V V	-80		100 5 60 10000 60 3000 450 450 202
)	$ \begin{array}{c} V \\ V \\ x \\ 10^{6} \end{array} \\ \begin{array}{c} nA \\ nA \\ s^{-1} \\ % \\ \mu \\ mA \\ \mu \\ \mu \\ \mu \\ M^{\circ} \\ M^{\circ} \\ r \\ r \\ ns \\ ns \\ ns \\ g \\ \mu \\ nA \\ x \\ 10^{6} \\ A/lm \\ C \\ V \\ V \end{array} \\ \begin{array}{c} V \\ V \\ V \end{array} $	$V V V X 10^{6}$ nA nA nA s <sup>-1</sup> % 0.1 mA mA $\mu A$ % °C <sup>-1</sup> ns ns ns ns ns g $\mu A$ nA x 10 <sup>6</sup> A/lm °C -80 V V V	$\begin{array}{cccccccccccccccccccccccccccccccccccc$

<sup>(1)</sup> subject to not exceeding max. rated sensitivity <sup>(2)</sup> subject to not exceeding max rated V(k-a)

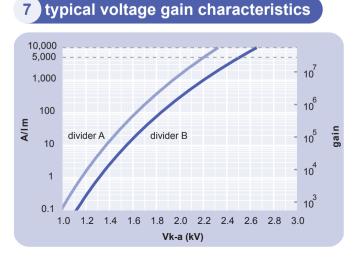


#### 8 voltage divider distribution

		l <sub>2</sub>						
А	300V R	R · · · · ·	· · · · · R	R	R	R	R	Standard
В	300V R	R • • • • • •	····· R	1.25R	1.5R	2R	3R	Extended linearity


Characteristics contained in this data sheet refer to divider A unless stated otherwise.

### 9 external dimensions mm

The drawings below show the 9863/100B in hardpin format and the 9863/100KB with the B20 cap fitted.

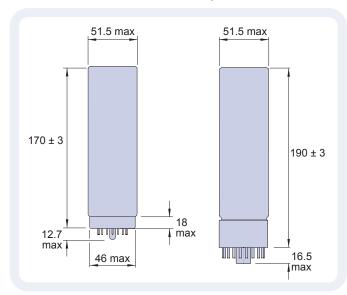

#### 10 base configuration (viewed from below)

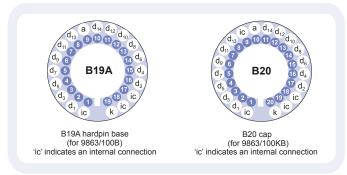

Our range of B19A sockets is available to suit the B19A hardpin base. Our range of B20 sockets is available to suit the B20 cap. Both socket ranges includes versions with or without a mounting flange, and versions with contacts for mounting directly onto printed circuit boards.

## 11 magnetic sensitivity


The location of the active area will move if a magnetic field is applied. Even when operating in the earth's field it is recommended that the S option is chosen for this type (see section 12). 12 ordering information

The 9863/100B meets the specification given in this data sheet. You may order **variants** by adding a suffix to the type number. You may also order **options** by adding a suffix to the type number. You may order product with **specification options** by discussing your requirements with us. If your selection option is for a one-off order, then the product will be referred to as 9863/100A. For a repeat order, ET Enterprises will give the product a two digit suffix after the letter B, for

example B21. This identifies your specific requirement.

9863/100B series data sheet

page 2

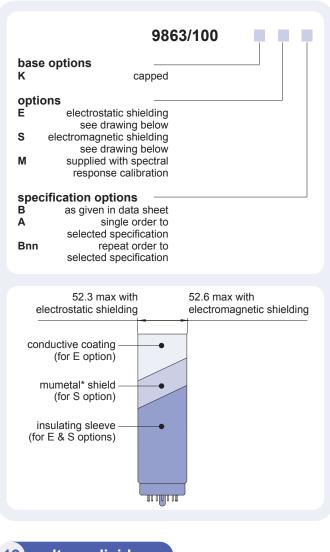

12 voltage dividers

The standard voltage dividers available for these pmts are tabulated below:

9863/100	
В КВ	
C638C C641C	300 V R R R R R R
C638D C641D	300 V R R 1.25R 1.5R 2R 3R

#### R = 330 kΩ

\*mumetal is a registered trademark of Magnetic Shield Corporation

choose accessories for this pmt on our website

#### an ISO 9001 registered company



The company reserves the right to modify these designs and specifications without notice Developmental devices are intended for evaluation and no obligation is assumed for futur manufacture. While every effort is made to ensure accuracy of published information the company cannot be held responsible for errors or consequences arising therefrom.

© ET Enterprises Ltd, 2010 DS\_ 9863/100B Issue 6 (21/09/10)

ET Enterprises Limited 45 Riverside Way Uxbridge UB8 2YF United Kingdom tel: +44 (0) 1895 200880 fax: +44 (0) 1895 270873 e-mail: sales@et-enterprises.com web site: www.et-enterprises.com

ADIT Electron Tubes 300 Crane Street Sweetwater TX 79556 USA tel: (325) 235 1418 toll free: (800) 521 8382 fax: (325) 235 2872 e-mail: sales@electrontubes.com web site: www.electrontubes.com